
24 V ROTARY DOOR MECHANISM

Electric door actuator mechanism for single- and double-leaf, outward- and inward-opening vehicle doors. Available in emergency-blocked and non-blocked versions.

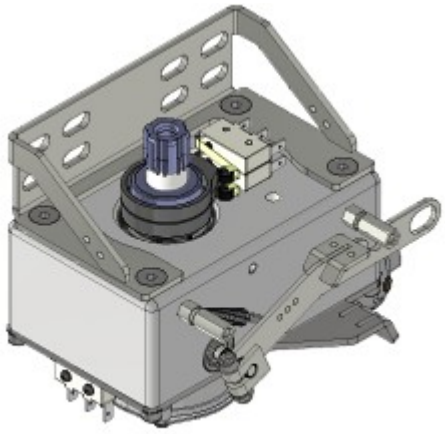

Operating voltage
24 VDC
Controller current protection threshold
9 A
Output type
Rotary
Architecture
Emergency-blocked / non-blocked versions
Emergency type
Mechanical emergency release
Opening direction
Outward and inward
Mounting position
Upper or lower side

MOTOR AND ELECTRICAL DATA

PARAMETER	VALUE
Operating voltage	24 VDC
Motor no-load speed	80 rpm +/-10%
Motor no-load current	< 2.5 A
Controller current protection threshold	9 A
Motor blocked current	< 15 A
Motor blocked torque	> 9 N·m
Noise	< 65 dB
Motor temperature rise	< 70 °C

TRANSMISSION AND CALCULATED MECHANISM PERFORMANCE

PARAMETER	VALUE
Mechanism no-load speed @ 24 VDC	approx. 6.4 rpm
Theoretical blocked output torque	> 112.5 N·m

MECHANICAL CONSTRUCTION

PARAMETER	VALUE
Overall envelope	approx. 219.3 x 142.2 x 208.2 mm
Emergency operation	Mechanical cable release
Application	Single- or double-leaf, outward- or inward-opening door

ENGINEERING NOTE: The controller interrupts motor drive at 9 A in the 24 V system.